

S  
P  
E  
C  
I  
A  
L

# Model 400 3-Way Valve

## Earthquake Actuated 3-Way Valve




The Model 400 earthquake actuated 3 way valve offers a redirection of dry air or nitrogen from the pressure ( n/o ) to the exhaust ( n/c ) port during a seismic event. Reset is simple using a flat blade screw driver and the valve status window, see included instructions.

Using an aluminum body, with steel and brass parts, coupled with PSP's proprietary patented seismic triggering technology the model 400 3-Way valve will provide many years of dependable seismic protection.

Typical applications include

### Specifications

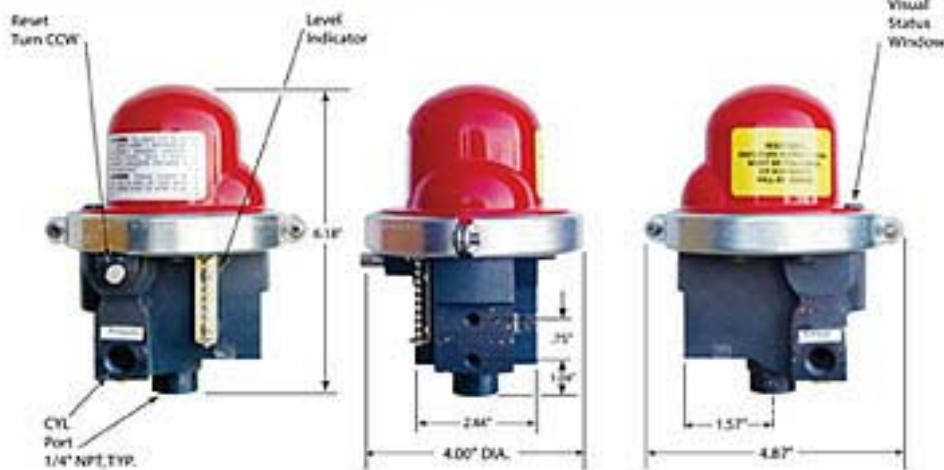

**Warning: For Use With Dry Air or Nitrogen Only ( No Plant Air )**

**Leakage: External**

None, with 100 psi internal pressure for 60 seconds, n/c & n/o ports plugged

**Leakage: Internal ( Tripped Condition )**

None, with 60 psi internal pressure for 30 seconds, normally open port

Ports: All Ports 1/4 NPT

**Distributed by Strand Earthquake Consultants**  
 Tel: (310) 473-2426 or 473-2316. Toll free: (800) 978-7263  
 Fax: (310) 473-1366. Website: [www.strandearthquake.com](http://www.strandearthquake.com)  
 1436 S. Bentley Ave., Ste. #6, Los Angeles, CA 90025 USA  
 Manufactured by Pacific Seismic Products, Inc.